


40mm Stroke Pneumatic Crimping Applicator

RSA-ENA-21U





7 DAYS
lead time

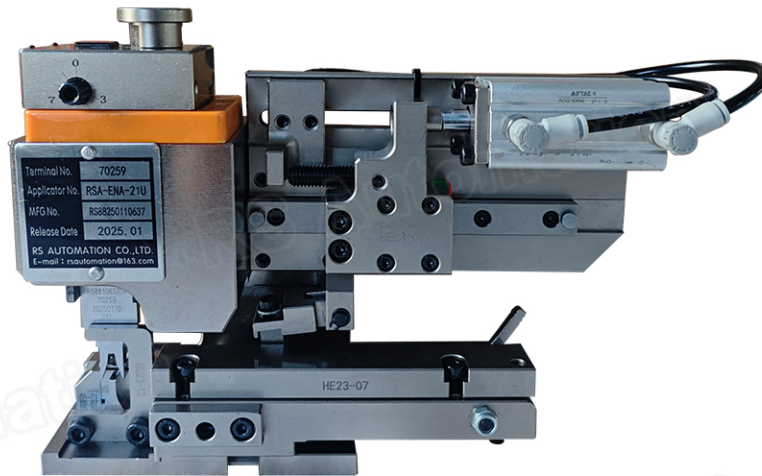

Feature

- ▶ Especially applicable for all kinds of U-shaped terminal crimping. 1-to-1, 1-to-N and N-to-N wire splicing are available.
- ▶ Continuous crimping height adjustment provides a 0.02mm resolution for C.H./I.H. with a 2.0mm range, which meet every rigorous demand on the crimping.
- ▶ Modular framework to make adjustment and maintenance easier.
- ▶ Save repeated invest. It can work for European-type semi-automatic and fully automatic crimping machine.
- ▶ Each applicator delivered will be attached with a terminal cross section analysis report.
- ▶ Lower maintenance cost. Special surface treatment to ensure strong corrosion resistance.
- ▶ Choose according to your terminal tape shape: forward direction or reverse direction.



Specification

Model	RSA-ENA-21U
Stroke	40mm
Feeding type	End Feed
Shut Height	135.78mm
Wire Range	0.08-8mm ²
Terminal Thickness	0.2-1.2mm
Terminal Feed Direction	Vertical (Forward or Reverse)
Terminal Pitch	40mm (Max)
weight	5.5kg
Dimension	L220mm*H105mm*W155mm