



30mm/40mm Strokes Terminal Crimping Machine

RSA-TC-40J/40E




Feature

- ▶ Adopt frequency conversion controlling system, very low noise and power saving.
- ▶ Special casting cavity design and 20mm thickness high-density side plate to guarantee the service life and accuracy
- ▶ Adopt high rusty-proof treatment to the mechanical parts to ensure the longer time less maintenance.
- ▶ Can be equipped CFA/CFM to provide the good quality production process.

Specification

Model	RSA-TC-40J	RSA-TC-40E
Crimping force	4Ton	4Ton
S.P.M	MAX175 S.P.M	MAX175 S.P.M
Stroke	30mm	40mm
Accuracy	0.02mm	0.02mm
Motor	1.5KW	1.5KW
Power	AC 220V 50/60 HZ	AC 220V 50/60 HZ
Shutting Hight	119.7mm	135.8mm
Thickness (Side Plate)	19mm	19mm
Dimension	L550mmxW400mmxH1100mm	L550mmxW400mmxH1100mm
Weight	124kg	124kg
Packaging Size	L650mmxW510mmxH1070mm	L650mmxW510xH1070mm

Details of machine (40mm stroke)

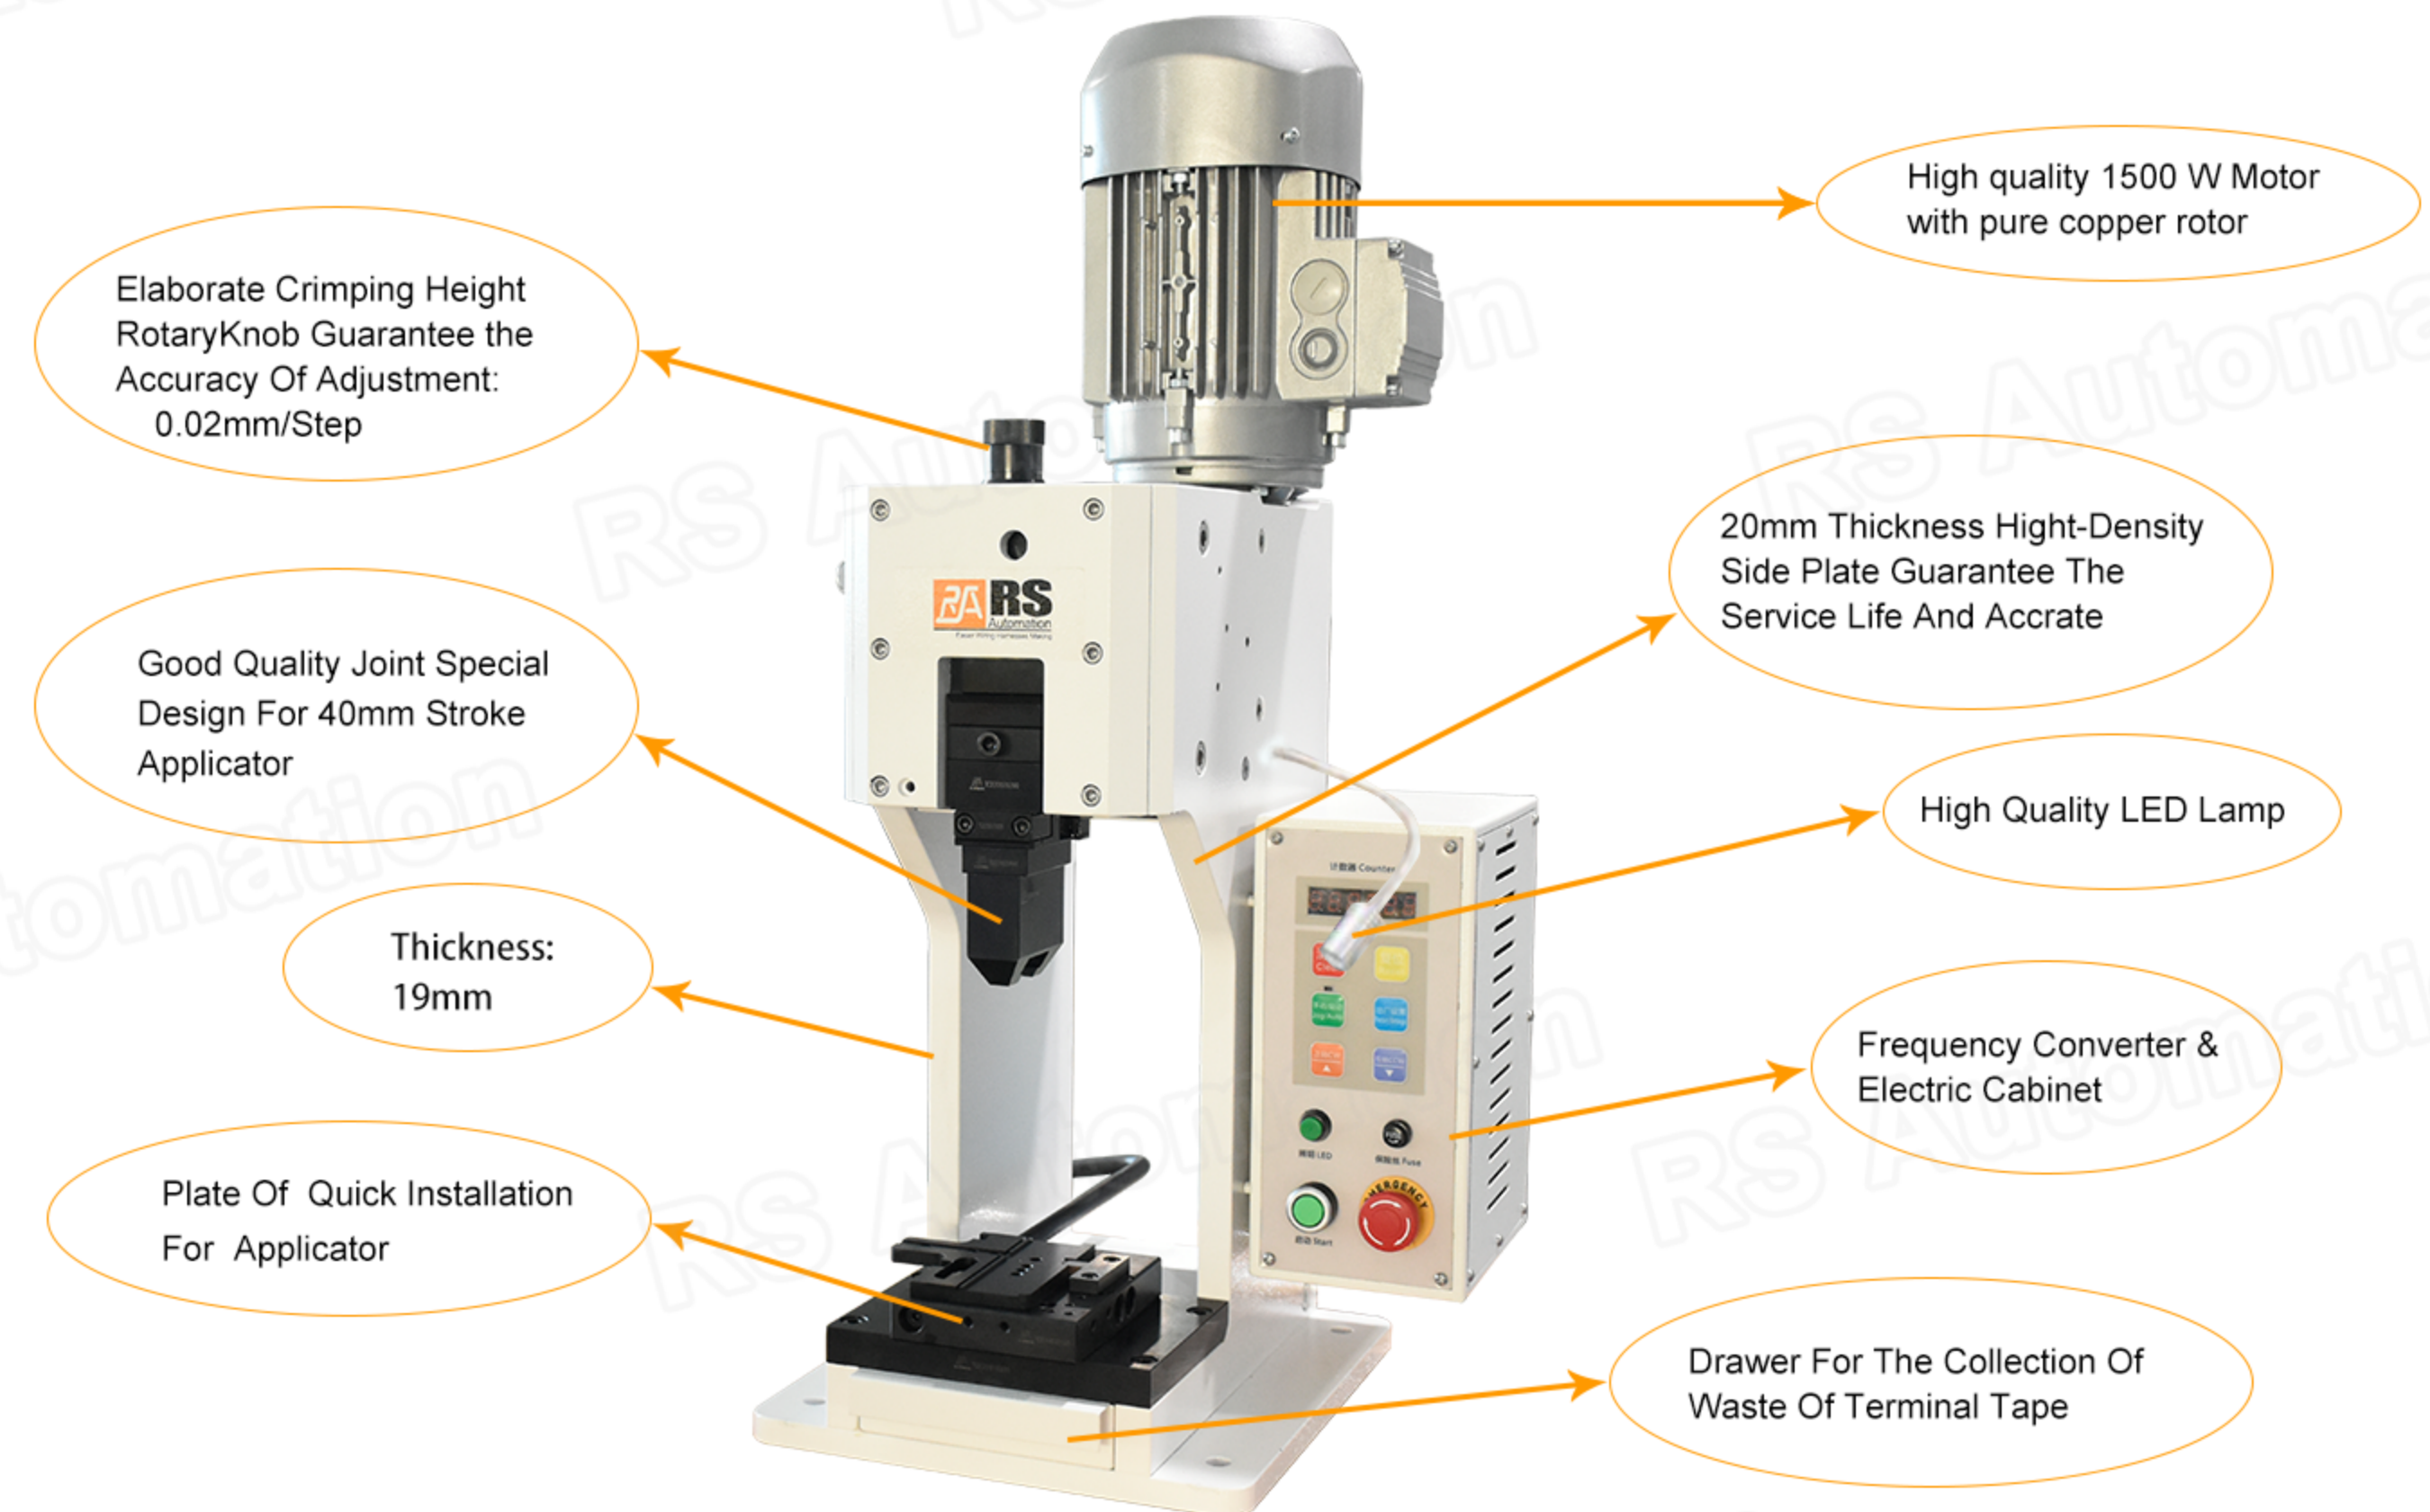

Joint For OTP Applicator (30mmStroke)

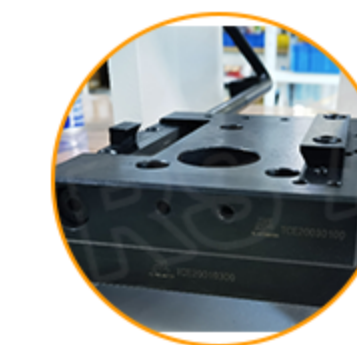


Plate Of Quick Installation For OTP Applicator



Joint For European Applicator(40mm stroke)

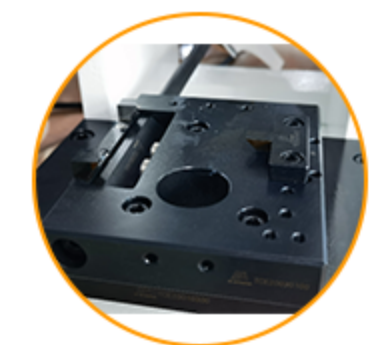


Plate Of Quick Installation For European Applicator



Special Casting Cavity

Adopt casting cavity , infiltrated with lubrication oil , providing better wear-proof and durable life.

