


40mm Stroke Pneumatic Crimping Applicator

RSM-ENA-40S



7 DAYs
lead time

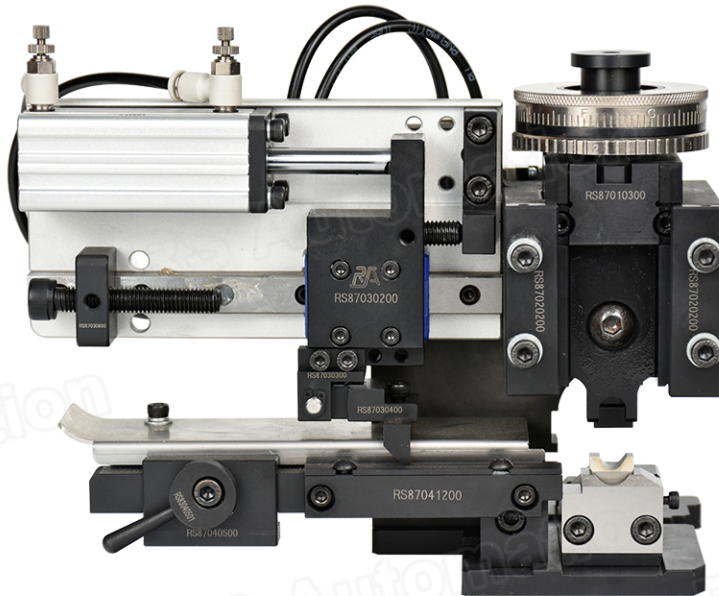

Feature

- ▶ Suitable for the processing of large terminals and wires of 3mm²-15mm², and terminal thickness can reach up to 2mm.
- ▶ Continuous crimping height adjustment provides a 0.02mm resolution for C.H./I.H. with a 2.0mm range, which meet every rigorous demand on the crimping.
- ▶ Modular framework to make adjustment and maintenance easier.
- ▶ Terminal pitch 45mm become true easily and feeding speed can be adjusted with facility.
- ▶ Save repeated invest. It can work for semi-automatic and fully automatic crimping machine for Komax, AMP, Mecal and so on;
- ▶ Each applicator delivered will be attached with a terminal cross section analysis report.
- ▶ Lower maintenance cost. Special surface treatment to ensure strong corrosion resistance.
- ▶ Each spare part has its own P/N number for easier maintenance.

Specification

Model	RSM-ENA-40S
Feed Type	Side Feed
Stroke	40mm
Shut Height	135.8mm
Wire Size	3mm ² -15mm ²
Terminal Thickness	2mm (Max)
Feeding System	Pneumatic
Terminal Pitch	45mm (Max)
Weight	5.4kg
Dimension	L215mm*W104mm*H165mm