# Wire Stripping and Crimping Machine

RSM-SCM-20E



#### **Feature**


► Side feed/end feed Mechanical/Pneumatic applicators can both be used in RSM-SCM-20E which can support rapid applicator change.


### **Applicable Applicator**



RS AUTOMATION CO.,LTD.
Room 301-1,No.639-6 Er huan nan road,
Tong an district,Xiamen City,China.
Web: www.cable-peeler.com
Tel: +86-592-7126865/67

► Sheath cable with multi-core wires applicable. Sheath strip length could be very short: the Minimum is 30mm for side-feed applicator and 20mm for end-feed applicator.

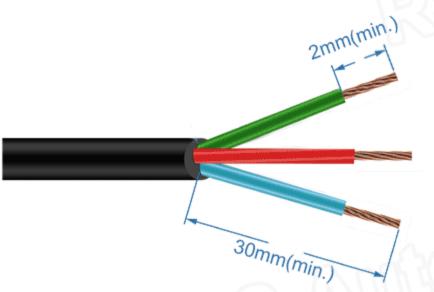

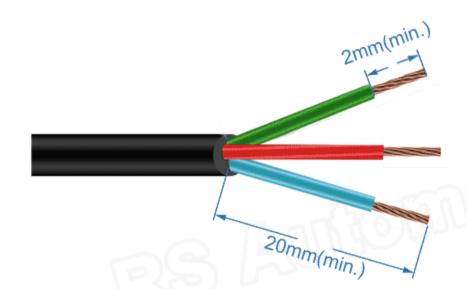

Sheath Stripping Length for Side-feed Applicator

**Sheath Stripping Length for End-feed Applicator** 

- ► High productivity with extremely short cycle time, only 1.2 s.
- ► Traditionally, in the production line where stripping and crimping are separated, wire strands disorder or time consuming would occur, which can be perfectly settled by RSM-SCM-20E.
- Stripping and crimping can be completed with only one insertion, which ensure easy operation.
- Cutting depth and Stripping length can be adjusted by Micro Regulating Rod.
- Less noise than traditional terminals, and more power saving.
- ▶ Adopt 7 inch HMI operation interface, the parameters are visualized and easy to understand.
- ► CFM/A is Applicable.

## **Specification**

	Model	RSM-SCM-20E
	Applicable Applicator	European Crimping Applicator(side feed/end feed),European Pneumatic Applicator
	Stripping Length Range	2mm-10mm(single wire)
	Cable Range	0.35mm²-3.0mm² (Customizable)
	Crimping Force	2 ton
	Stroke	40mm
	Shut Height	135.8mm
	Power	220v (single phase)
	Air Source	0.5~0.8Mpa
	Weight	120kg
	Dimension	L500mmxW350mmxH780mm

## **Crimping Force Monitor (Optional)**

