
Valve Bag Sealing Machine

RSM-US-200

Scan to watch video

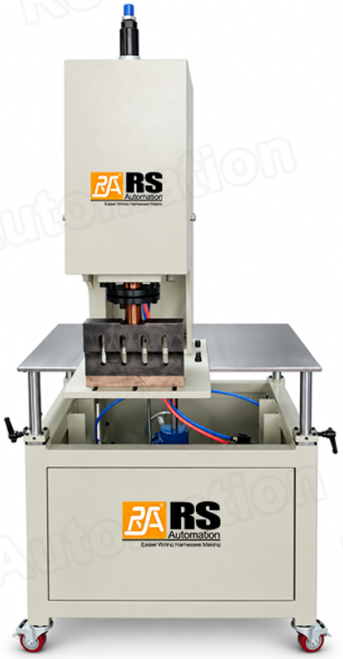

Feature

- No thread or glue. Hermetic seal, zero fine powder leakage, good dust & moisture resistance.
- Stable sealing even with powder on bag mouth, for putty, tile adhesive, dry mortar & chemical powders.
- No needles/threads. Only clean the horn; less consumable cost.
- Small size with casters, easy to connect to existing filling lines, fits small workshops.

Specification

Model	RSM-US-200
Ultrasonic frequency	20 kHz
Ultrasonic power	2000 W (2 kW)
Effective sealing width	200 mm (the "200" in the model denotes the sealing width)
Welding horn (sonotrode) size	200 × 25 mm
Power supply	AC 220V, 50 Hz
Drive method	Pneumatic boosting (cylinder down-pressure)
Sealing time	0.1–9.99 s, adjustable
Suitable bags	PP woven valve bags, PE inner-liner valve bags, kraft-paper composite valve bags
Control method	Foot switch
Air supply pressure	0.1–0.6 MPa
Machine weight	155 kg
Machine dimensions (L×W×H)	1200 × 1200 × 1600 mm

RS AUTOMATION CO.,LTD.
Room 301-1,No.639-6 Er huan nan road,
Tong an district,Xiamen City,China.
Web: www.cable-peeler.com
Tel: +86-592-7126865/67