

ZDQ-13R Nylon Tie Strapping Tool

1.Feture

Greater range of cable tie width from 5mm-10mm.

The residual tail of the tie can be set down to 3mm via the specific jigs changed.

Cuts the cable tie tail into a smooth, rounded end that won't scratch or poke.

User friendly and good looking design with anti-slip handle.

The strapping tension is adjustable by the adjusting knob accordingly.

2.Details Description




3.Accessaries

3.1 Jigs for tie tail length control (3mm-8mm)



3.2 Arc Cutter

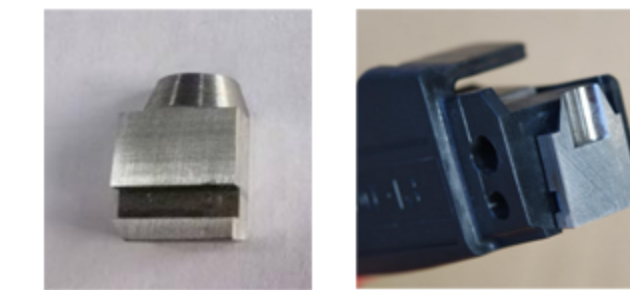

4.How to use

1 Strap the subject by manual




2 Set The Tension Required



5 Push The Trigger To Tighten And Cut Off The Tie



3 Lock The Tie

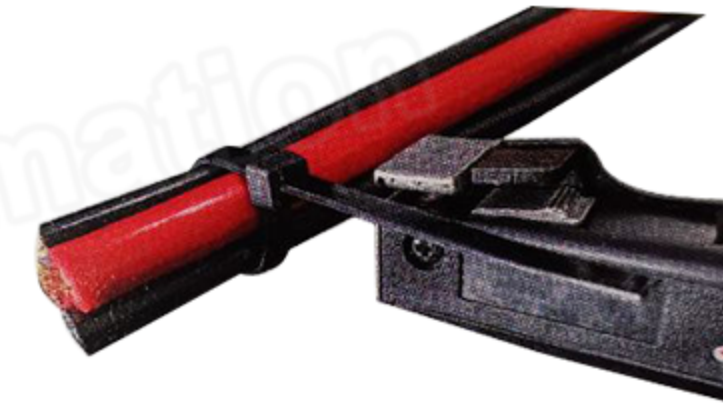

4 Tighten The Tie



5.Strapping Tension Reference

Value Scope	Grade of Value	Tension Scope(Ref. Unit: N)	Tie Width (MM)
0-4	0	35~80	2.8
	1	55~100	
	2	80~125	3.5-4.0
	3	110~165	4.0-5.0
	4	130~185	5.0-7.6
5-8	5	150~200	
	6	205~270	7.6-10
	7	235~300	
	8	260~325	