


Wire Stripping & Terminal Crimping Machine (Electric)

RSE-STC-2307

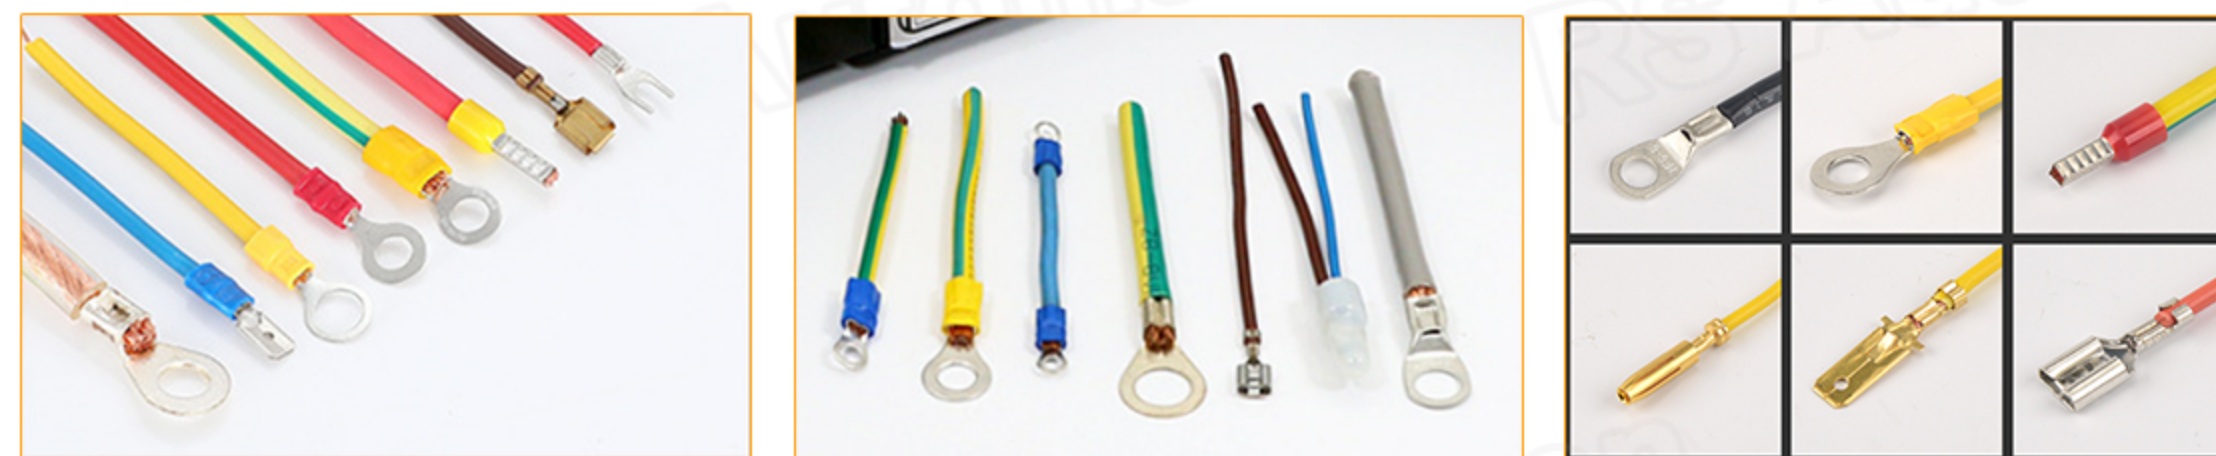

Feature

- ▶ Integrated with functions of wire cutting, stripping and terminal crimping, which can save the invest on two or three machines with single function.
- ▶ Suitable for pre-insulated terminal crimping from 0.25-10mm² (AWG 23-AWG 7).
- ▶ Strong stability with constant speed motor, which ensure the good consistency of crimping. It is good for terminal crimping in large quantity.
- ▶ The electric machine outshines the manual wire crimper with its labor-saving and quality -guaranteed traits.
- ▶ Strong adaptability. 8 sets of precision crimping applicator are available, which allow replacement at any time if there are different kinds of terminals to be crimped.

Specification

Model	RSE-STC-2307
Function	Wire cutting, stripping & terminal crimping
Cable Range	0.25-10mm ² (AWG 23-7)
Crimping Force	12.7KN
Voltage	AC 220/110v (single phase)
Weight	18KG
Dimension	L325mm×W265mm×H150mm

Conventional Crimper Reference

Terminal Type	Crimping Range
Ferrules	0.25-35mm ²
Twin ferrules	2×0.5, 1.0, 1.5, 2.0, 2.5, 4.0, 6.0mm ²
Insulated O-type or Y-type terminals	0.25, 0.5, 1.0, 1.5, 2.0, 2.5, 4.0, 6.0mm ²
Non-insulated O-type or Y-type terminals	0.5, 1.0, 1.5, 2.0, 2.5, 4.0, 6.0, 10.0mm ²
Males, females receptacles	0.5, 1.0, 2.0, 2.5, 4.0, 6.0mm ²
Contact pin for rectangular connector	0.5, 1.0, 2.0, 4.0mm ²

Configuration

