




Corrugated Tube Cutting Machine
RSM-COT-221S



Feature

► Neat cutting edge on the peak ensured by rotating blades with a set of guiding block each.

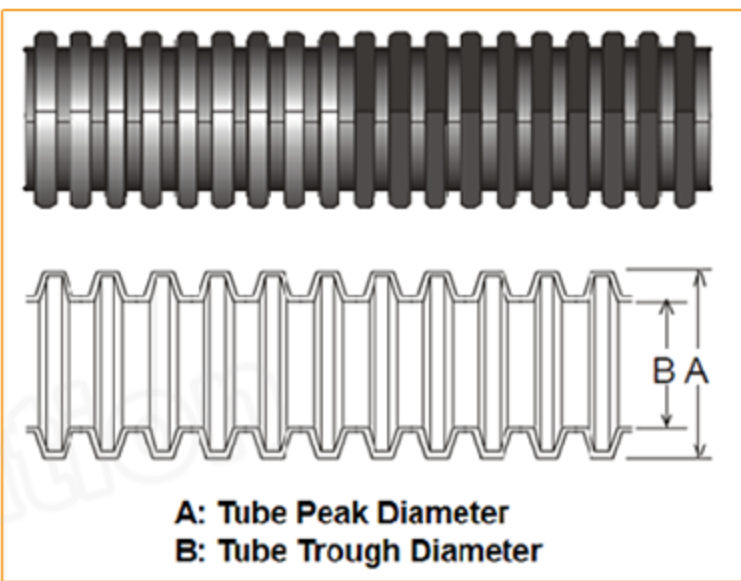

- High-speed corrugated tube (COT) feeding guaranteed by servo motor. The feeding speed can reach up to 3 m/sec in normal cases.
- Belt feeding ensures effective feeding length.
- Fully electrical-controlled system, no air source needed.
- User-friendly. Only need to choose the right memory/recipe for the COT changeover.
- For different corrugated tube changeover, the operator can choose two ways: select the right recipe/memory (stored COT) or encoding input (new COT).



Specification

Model	RSM-COT-221S
Tube O.D.	5-42mm
Feeding Speed	0-3000mm/s
Cutting Length	5-9999.9mm
Cutting Capability	Cut on peak
Cutting Accuracy	±0.2%/wave
Voltage	220V 50/60Hz
Power	2000W
Weight	171kg
Dimension	L600mm*W800mm*H1360mm

Wire Feeding System



Tube Feeder Wheel (Vertical)

or

+

+



Tube Feeder Wheel (Horizontal)



Tube Feeder



Tube Detector (Optical Fiber)

Name	Tube Feeder Wheel (Vertical)	Tube Feeder	Tube Detector (Optical Fiber)
Weight	85kg	77kg	16kg
Dimension	L860mm*W600mm*H1800mm	L700mm*W500mm*H1560mm	L420mm*L420mm*H1580mm